

1/4

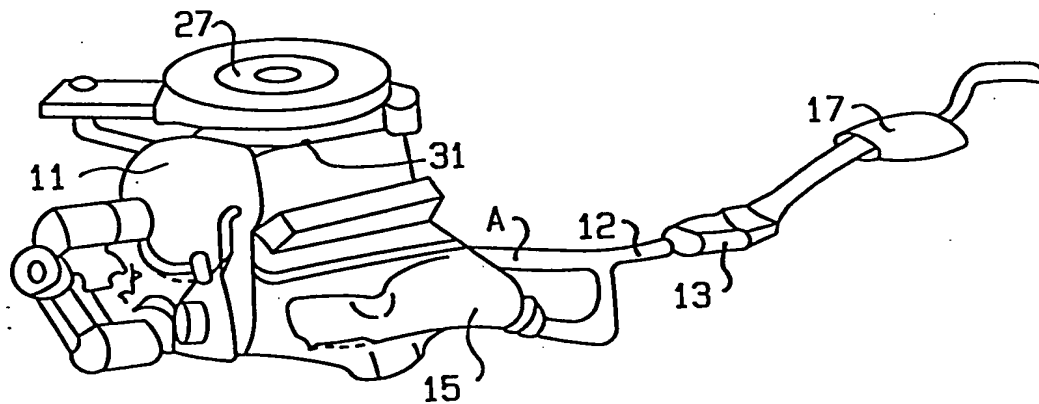


FIG. 1
(Prior Art)

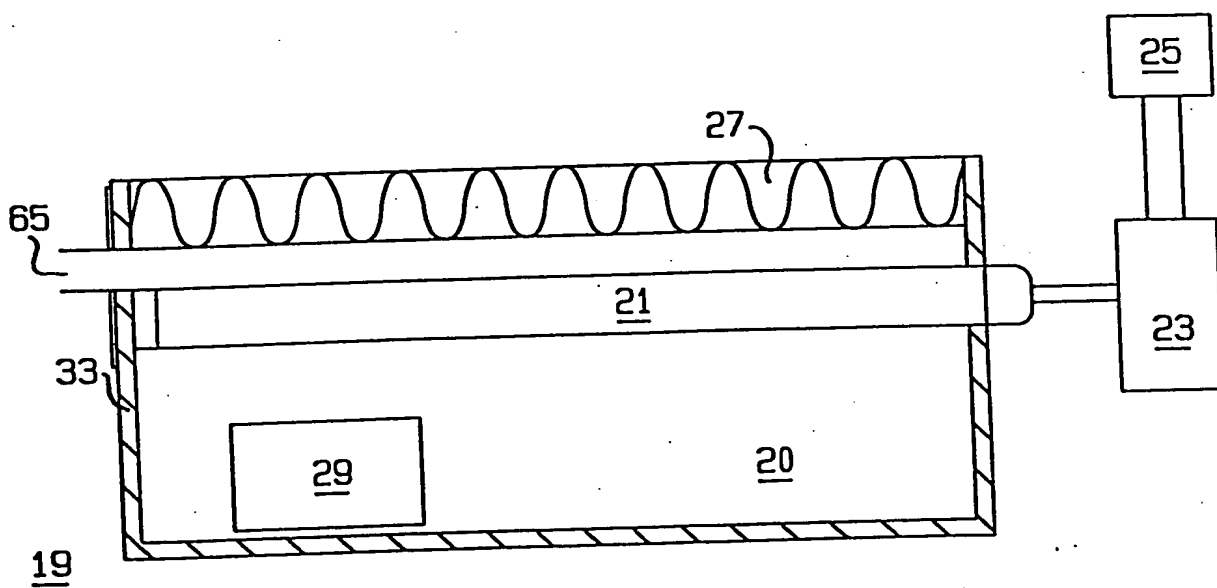


FIG. 2

2/4

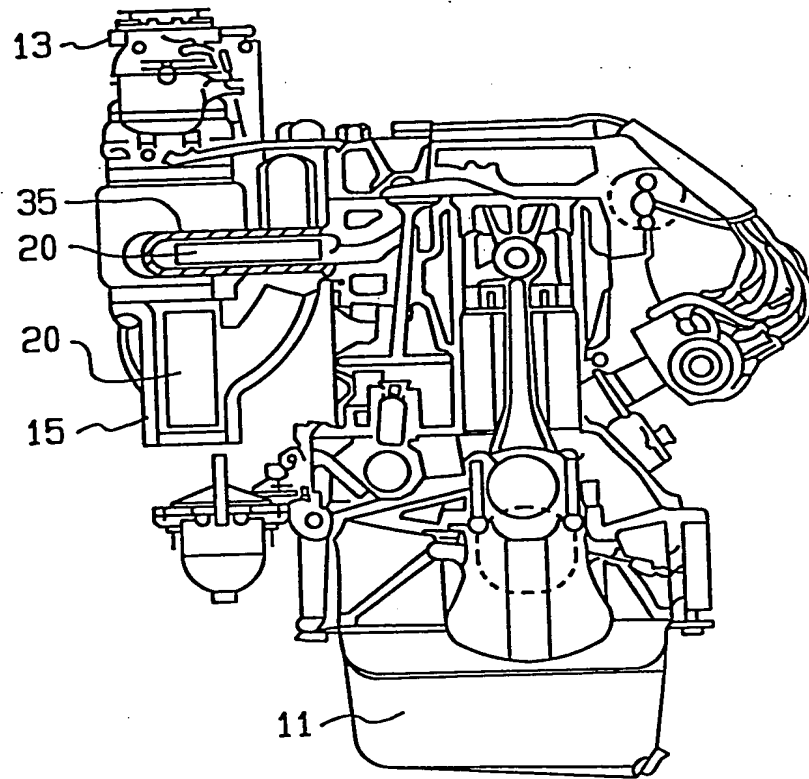


FIG. 3

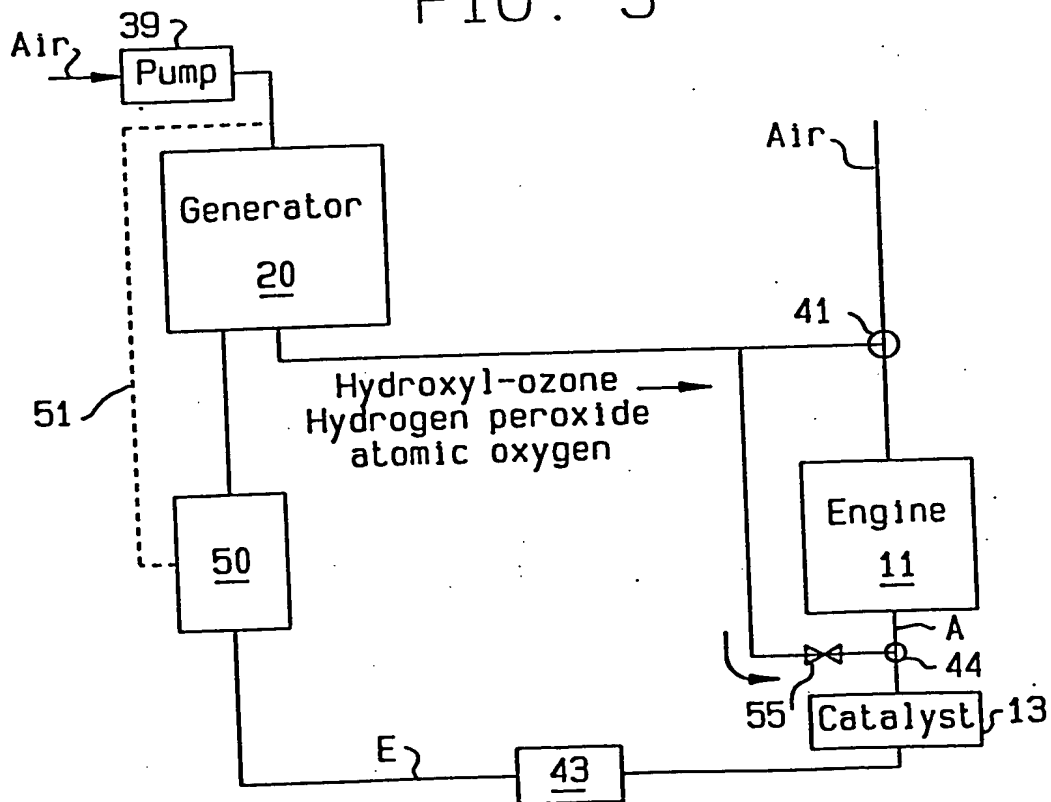


FIG. 4

3/4

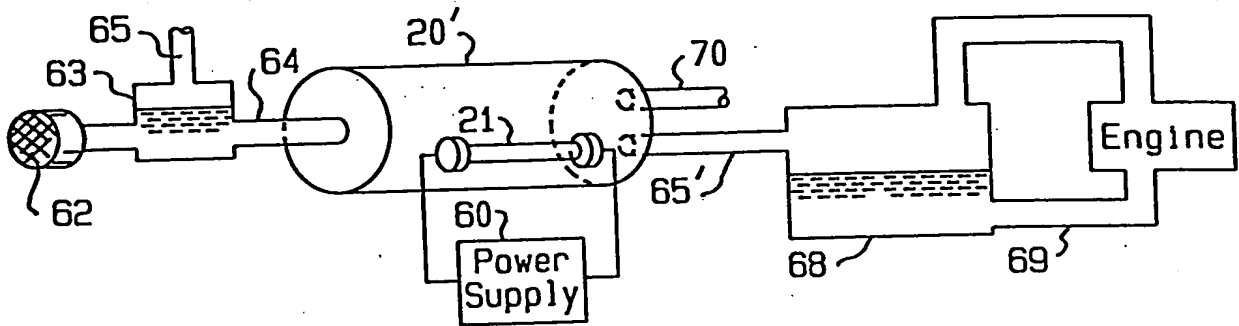


FIG. 5

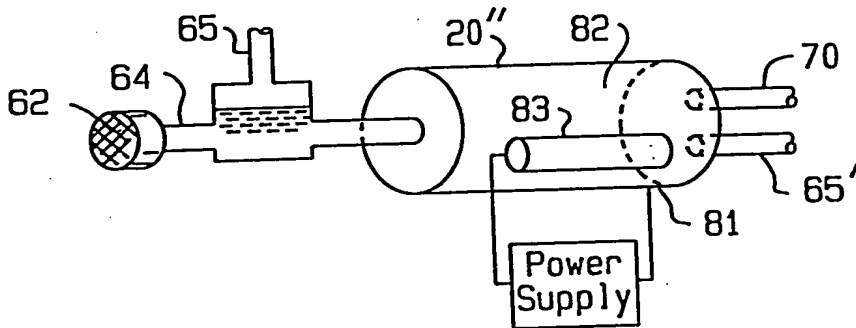


FIG. 6

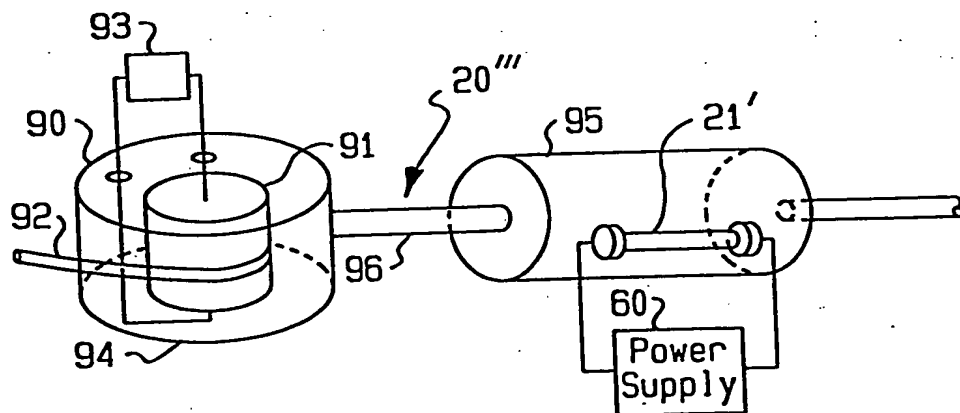


FIG. 7

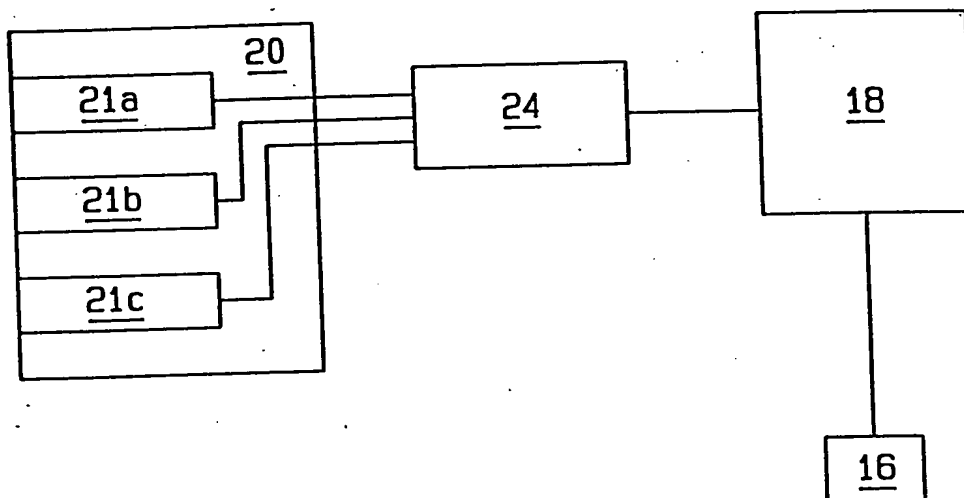


FIG. 8

Adding Hydroxyl to the combustion flow stream at least one point upstream or at the catalytic converter for treating exhaust gases produced by a combustion engine to at least reduce one pollutant from incomplete Combustion and/or oxides of nitrogen

Treating the exhaust gases with a high surface receptacle such as a catalytic converter

FIG. 9